




HIGH PERFORMANCE AERATION SYSTEMS VOLCANO II & III

The perfect choice when a high performance, lower profile, floating surface aerator is desired. Volcano II and Hydromax Aeration Series produce astonishing aeration results due to their high GPM pumping rates and oxygen transfer capabilities.

www.AquaMasterFountains.com


VOLCANO II

VOLCANO II
1/2 HP STANDARD

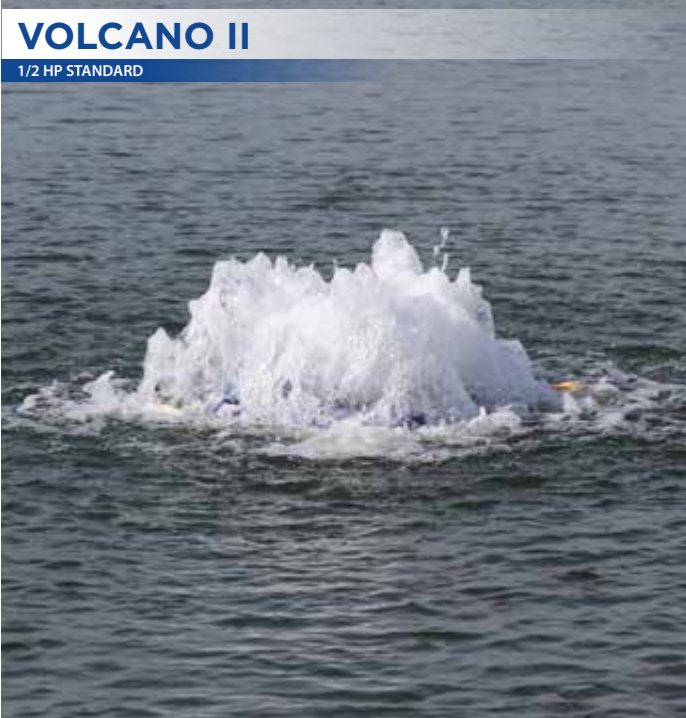


| HORSEPOWER | | 1/2 | HORSEPOWER | | 1/2 |
|------------|-------------|-------|------------|--------------------|-----------|
| 60HZ | HT X DIA ft | 1 x 4 | 50HZ | HT X DIA m | 0.3 x 1.2 |
| | GPM | 420 | | m ³ /hr | 88 |

ETNA
1/2 HP ETNA



| HORSEPOWER | | 1/2 | HORSEPOWER | | 1/2 |
|------------|-------------|--------|------------|--------------------|-----|
| 60HZ | HT X DIA ft | 4 x 12 | 50HZ | HT X DIA m | n/a |
| | GPM | 258 | | m ³ /hr | n/a |

SHASTA
1/2 HP SHASTA

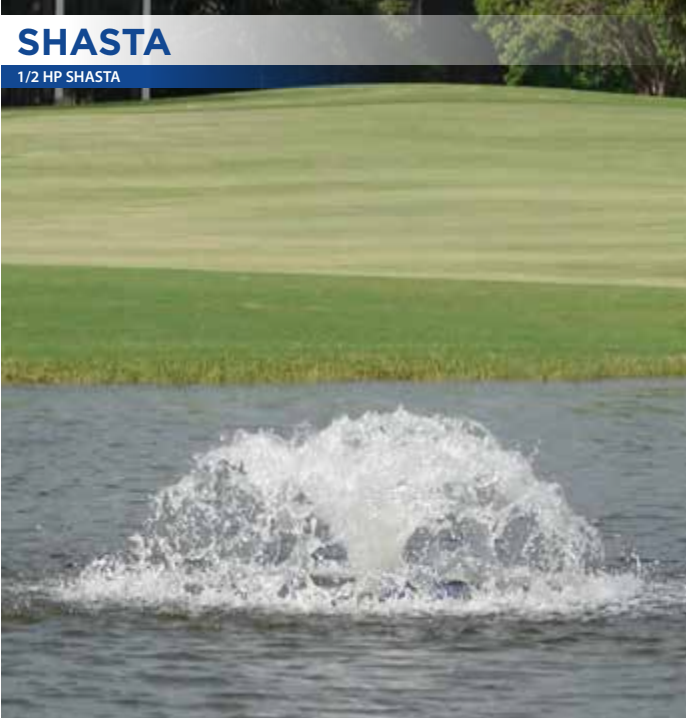

| HORSEPOWER | | 1/2 | HORSEPOWER | | 1/2 |
|------------|-------------|---------|------------|--------------------|-----------|
| 60HZ | HT X DIA ft | 1.5 x 7 | 50HZ | HT X DIA m | 0.5 x 1.5 |
| | GPM | 324 | | m ³ /hr | 66 |

1/2 HP VOLCANO II KEY FEATURES

- Available in 120V & 240V single phase
- Easily installed, similar to Floating Fountain Aerators
- Only requires two feet of operating depth
- Works in deeper depths with optional float mounted deep water intake
- Quality stainless steel components
- Night Glow LED or RGBW Lighting Systems available
- Creates a fluid boil effect, resulting in maximum pumping rates and O₂ transfer



DOMESTIC

1/2 HP: 3 Years Parts and Labor

INTERNATIONAL

1/2 HP: 2 Years Parts and 1 Year Labor

Warranties subject to change. Please contact AquaMaster® for most current warranties.

VOLCANO III

VOLCANO III STANDARD

5.5 HP STANDARD



| HORSEPOWER | | 1½ | 3½ | 5½ |
|------------|-------------|-----------|-----------|-----------|
| 60Hz | HT x DIA ft | 3 x 8.5 | 4 x 12 | 5 x 14 |
| | GPM | 1324 | 2130 | 2734 |
| 50Hz | HT x DIA m | 0.9 x 3.1 | 1.2 x 3.7 | 1.4 x 4.8 |
| | m3/hr | 327 | 485 | 686 |

VOLCANO III ETNA

5.5 HP ETNA



| HORSEPOWER | | 1½ | 3½ | 5½ |
|------------|-------------|-----------|-----------|-----------|
| 60Hz | HT x DIA ft | 5 x 12 | 7.5 x 20 | 9 x 28 |
| | GPM | 527 | 862 | 1377 |
| 50Hz | HT x DIA m | 1.4 x 3.1 | 1.5 x 4.9 | 1.8 x 5.5 |
| | m3/hr | 157 | 243 | 280 |



VOLCANO III KEY FEATURES

- Handles / tie downs on float
- Only requires three feet of operating depth
- One float for 1.5 - 5.5 HP units
- Robust frame
- Precision balanced stainless steel prop
- Adjustable light bracket accommodates one of two different sized light housings
- Custom biodegradable oil-cooled, energy efficient, servicable motors
- UL, cUL listed and CE approved



DOMESTIC


1.5 - 5.5 HP: 5 Years Parts and Labor

INTERNATIONAL


1.5 - 5.5 HP: 3 Years Parts and 1 Year Labor

Warranties subject to change. Please contact AquaMaster® for most current warranties.

1/2HP VOLCANO II DESIGN

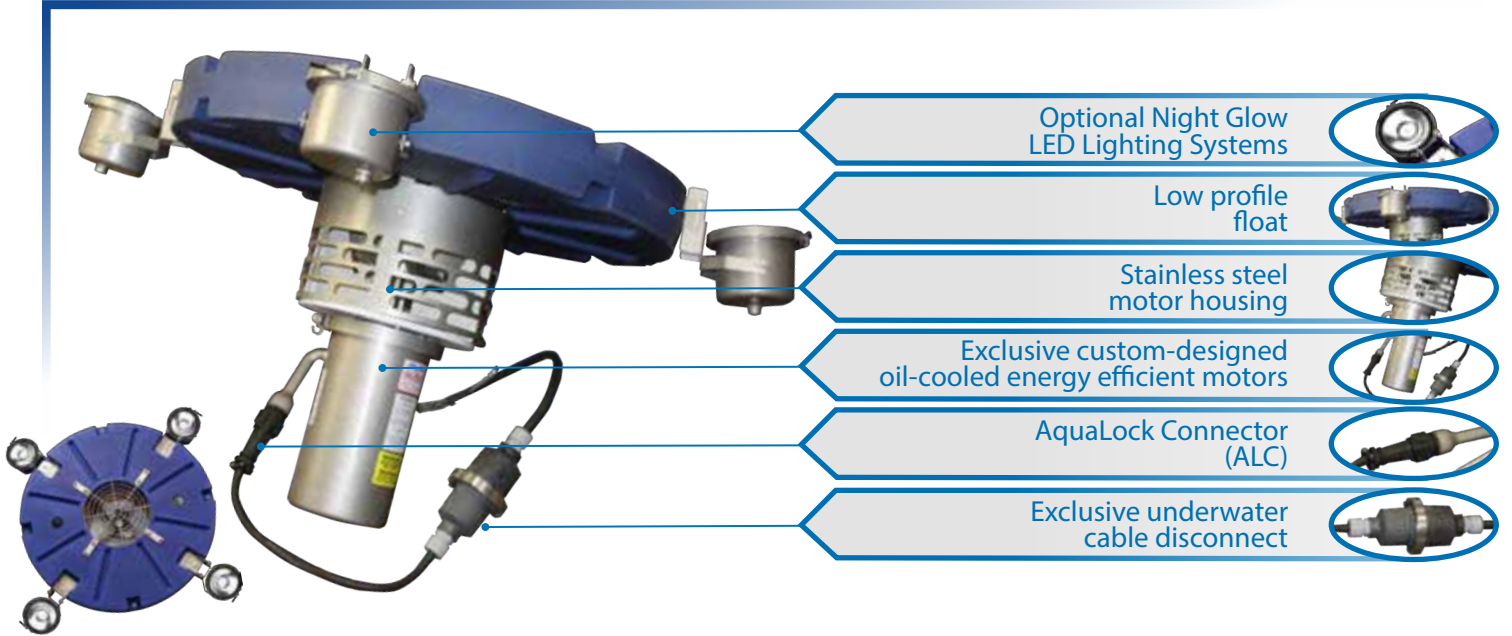

VOLCANO III DESIGN

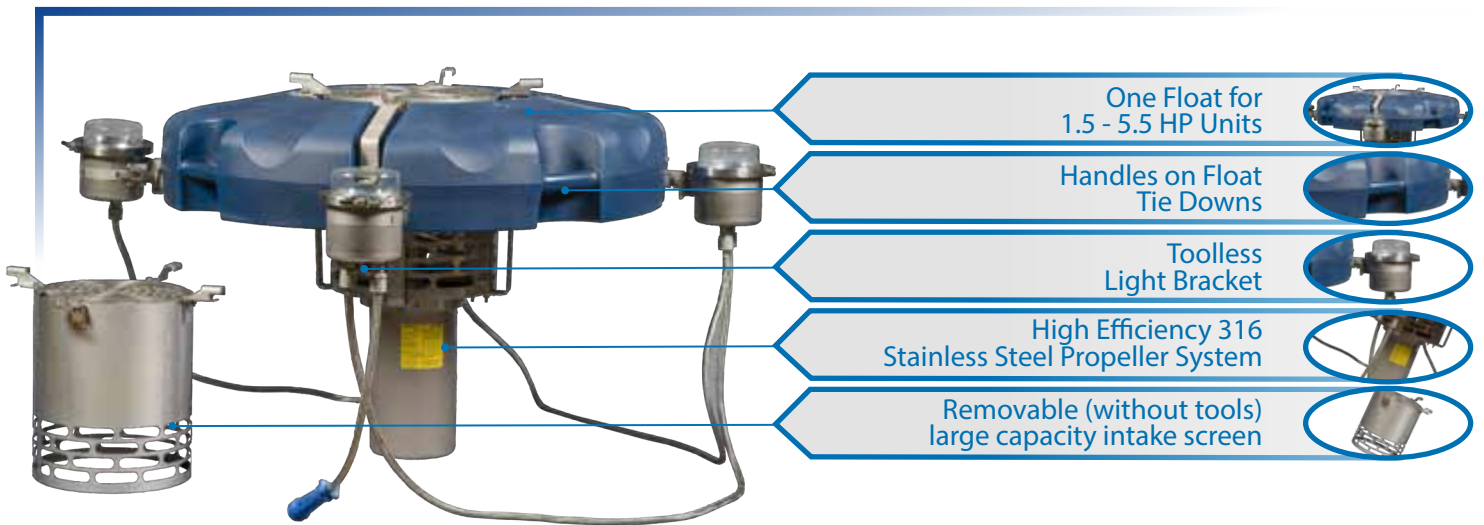

The perfect choice when a high performance, lower profile, floating surface aerator is desired. Volcano III Aeration Series produce astonishing aeration results due to their high GPM pumping rates and oxygen transfer capabilities.