

hether you're looking for aeration or an attractive display, this all-inone fountain & circulator is the ideal solution for small ponds less than three quarters of an acre in size. Easily converted in just minutes between the included four aerating fountain patterns and horizontal circulator; this unit comes complete with a 3-year warranty.


Smaller ponds tend to be shallow, and therefore need a system that will achieve proven results. Make sure when deciding on a small pond aeration system to compare circulation and oxygen transfer rates. When set to the Gemini pattern (seen above) this unit adds an amazing 1.13lbs or .5kg of oxygen per horsepower hour and pumps 506GPM or 115m³ per hour.

Enjoy the beauty of this aerating fountain at night by purchasing the deluxe package that comes complete with a beautiful 2-light LED or RGBW light system.

60 Hz	GEMINI	HIGH VOLUME	PHOENIX	ROCKET	MIXER
Spray Height (ft)	4	2	10.6	10.6	n/a
Spray Diameter (ft)	4.5	2.5	10.6	3	n/a
GPM	506	435	195	179	n/a*
an Ua					
50 Hz	GEMINI	HIGH VOLUME	PHOENIX	ROCKET	MIXER
Spray Height (m)	GEMINI 1.2	1	2.8	ROCKET	n/a
-					

*1/2HP Mixer volume influenced is 245,000ft3 (6938m3) and effectively moves water 115 linear feet (35 linear meters)



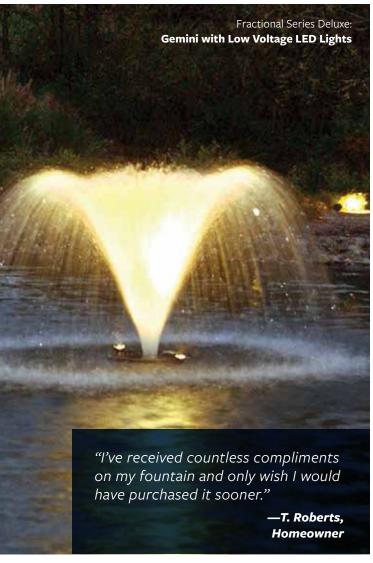



PRODUCT ILLUSTRATION

- 1 Includes corrosion resistant adjustable spray impellers/patterns to produce 4 spray patterns, and a horizontal mixer. [Comes assembled as Gemini]
- 2 Rugged low visibility foam filled polyethylene float with recessed light pockets.
- 3 Oil cooled, efficient 3250/2750RPM custom built motor incorporates a 316 stainless steel motor shaft and silicon carbide single seal to ensure dependability and long life.
- **4** Corrosion resistant, durable 18 gauge/316 grade stainless steel motor housing.
- **5** Stainless steel brackets allow for easy conversion between aerating fountain patterns and mixer model.
- **6** Adjustable discharge angle +/- 8 degrees. [Mixer model only]

Complete package is safety tested, approved and listed with ETL, 60Hz 230V electrical panels conform to UL508a. Products for the European Union are also safety tested, approved and carry CE certification. Minimum operating depth is 16in or 41cm. Visit www.otterbine.com for details. Also available as a Fixed Fountain.

 $\ensuremath{\mathsf{BUY}}\xspace$ ONLINE* at www.otterbine.com/buynow

*Only available in the continental U.S.A.







