


GALAXY SELECT® SERIES
AQUARIUS



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	55	65	70	80
HT x DIA ft LOWER	15 x 55	18 x 60	20 x 70	22 x 80
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A 3 220-240 34A 3 440-480 17A	3 220-240 44A 3 440-480 22A	3 220-240 54A 3 440-480 27A	3 220-240 64A 3 440-480 32A

GALAXY SELECT® SERIES DESIGN

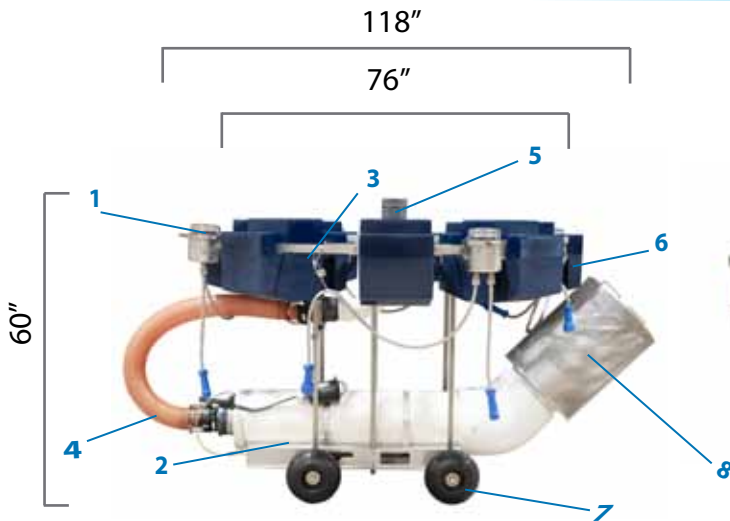

Galaxy Select® Series


- 1 - Tool Less Series 316 Stainless Steel Light Bracket
- 2 - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3 - 360° Available Tie Down Area
- 4 - Removable Discharge Tube and Intake Screen for Compact Storage
- 5 - Interchangeable Nozzles-Threaded and Tethered
- 6 - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7 - Easy Rolling Wheels with a Solid Axle
- 8 - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"


BRINGING WATER TO LIFE

INSTALLATION

ANCHORING

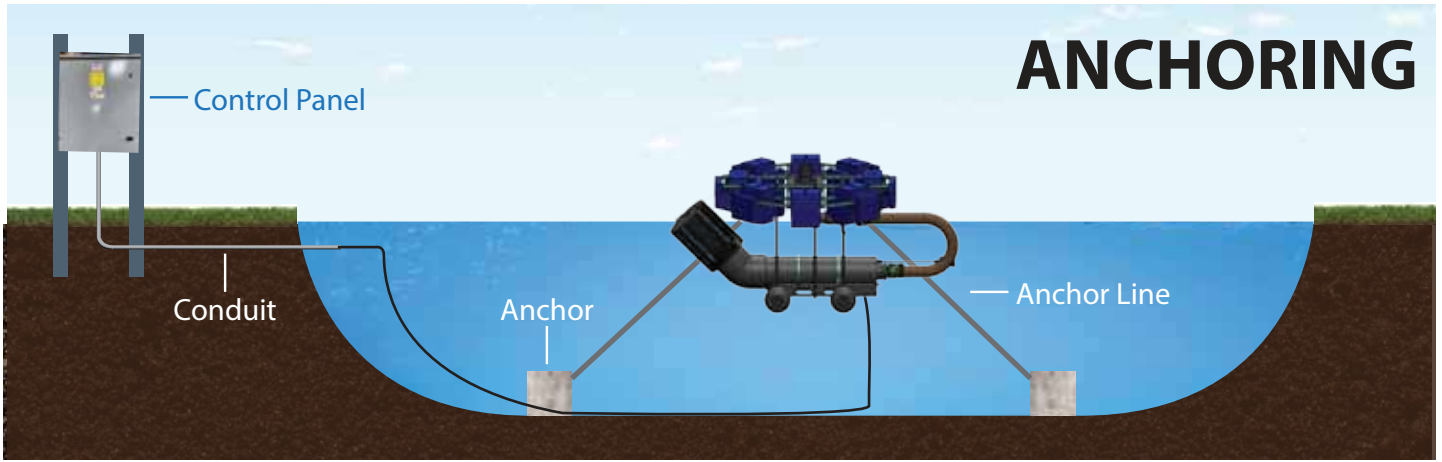

MOORING

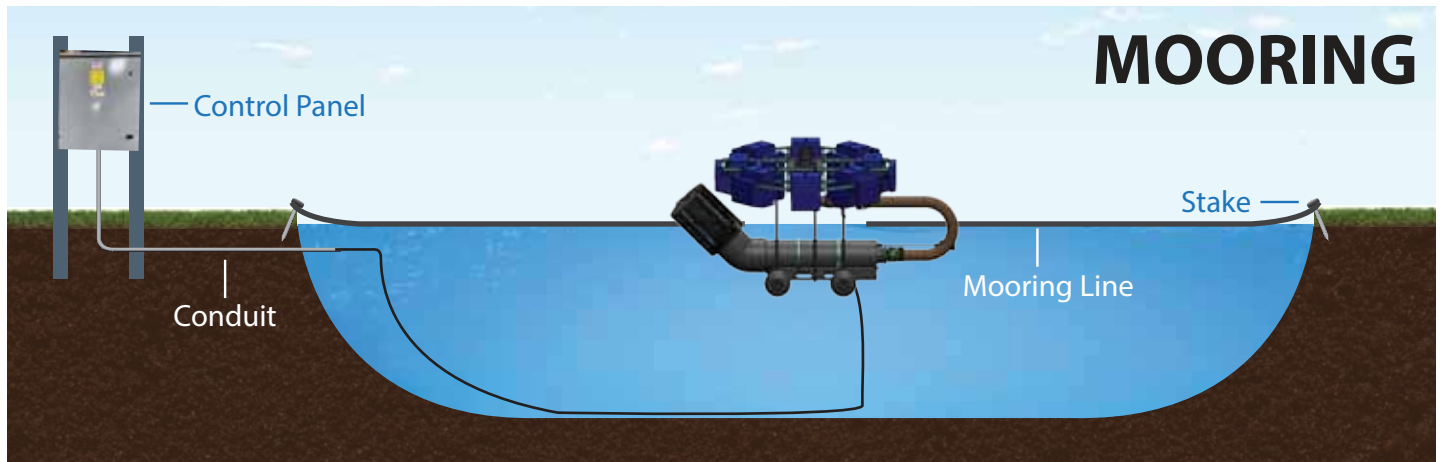

CONTROL PANEL

Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 overcurrent protection
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector




GALAXY SELECT® SERIES
ARIES



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	47	58	64	70
HT x DIA ft LOWER	30 x 60	35 x 60	37 x 60	40 x 65
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A 3 220-240 34A 3 440-480 17A	3 220-240 44A 3 440-480 22A	3 220-240 54A 3 440-480 27A	3 220-240 64A 3 440-480 32A

GALAXY SELECT® SERIES DESIGN

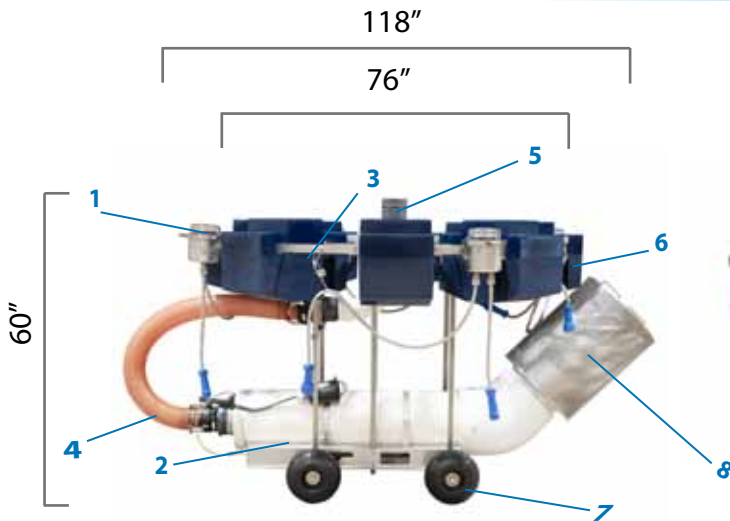

Galaxy Select® Series


- 1 - Tool Less Series 316 Stainless Steel Light Bracket
- 2 - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3 - 360° Available Tie Down Area
- 4 - Removable Discharge Tube and Intake Screen for Compact Storage
- 5 - Interchangeable Nozzles-Threaded and Tethered
- 6 - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7 - Easy Rolling Wheels with a Solid Axle
- 8 - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"


BRINGING WATER TO LIFE

INSTALLATION

ANCHORING

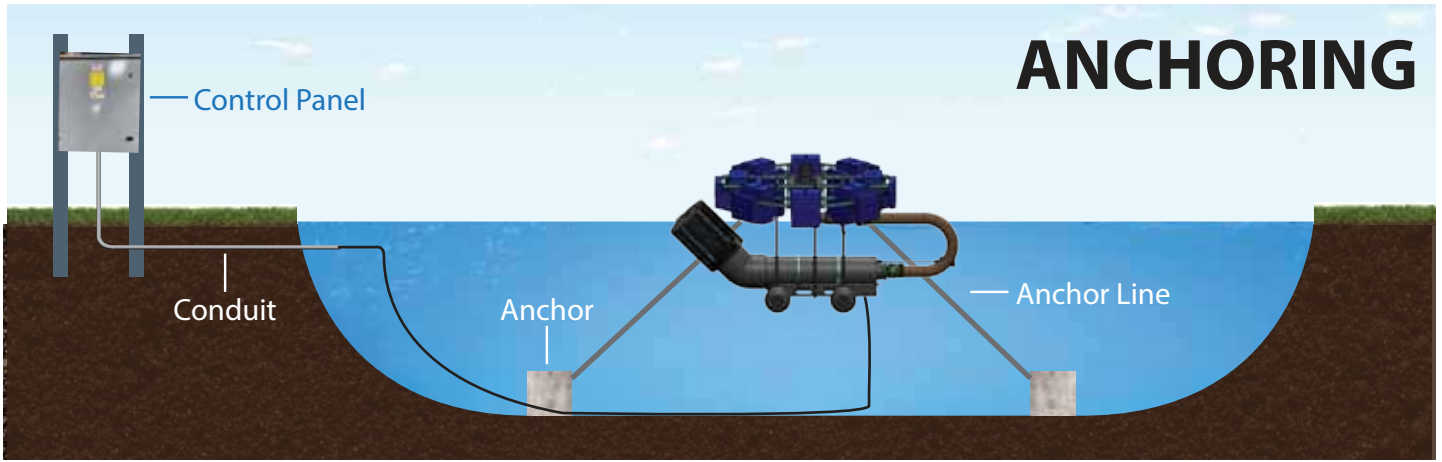

MOORING

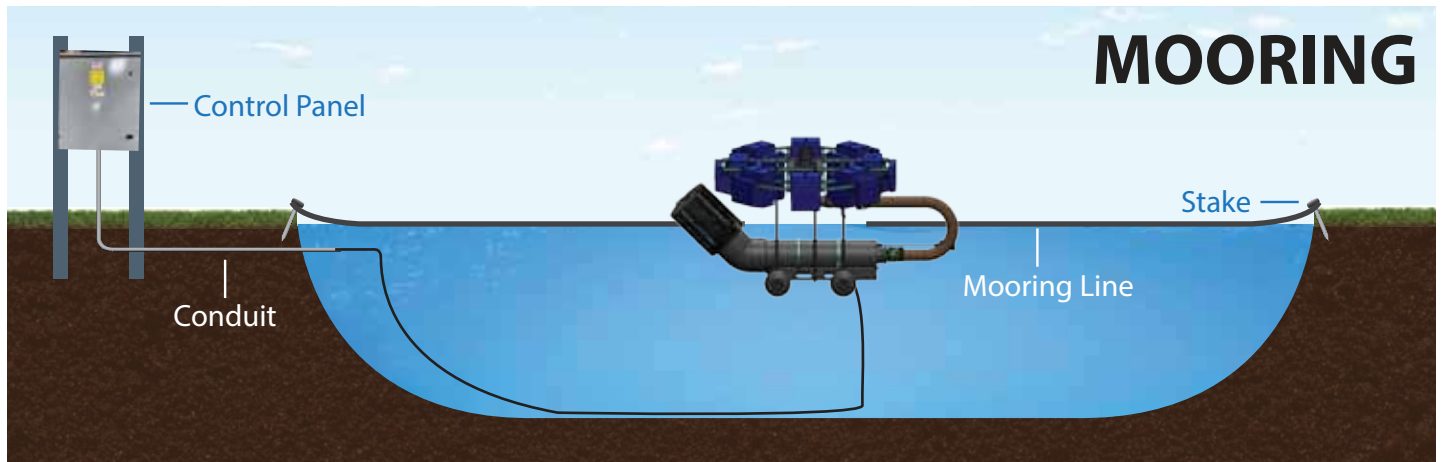

CONTROL PANEL

Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 overcurrent protection
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector



GALAXY SELECT® SERIES


GEMINI



HORSEPOWER	10	15	20	25
HT x DIA ft	65 x 2	76 x 2	85 x 2	104 x 2
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A 3 220-240 34A 3 440-480 17A	3 220-240 44A 3 440-480 22A	3 220-240 54A 3 440-480 27A	3 220-240 64A 3 440-480 32A

60Hz

GALAXY SELECT® SERIES DESIGN

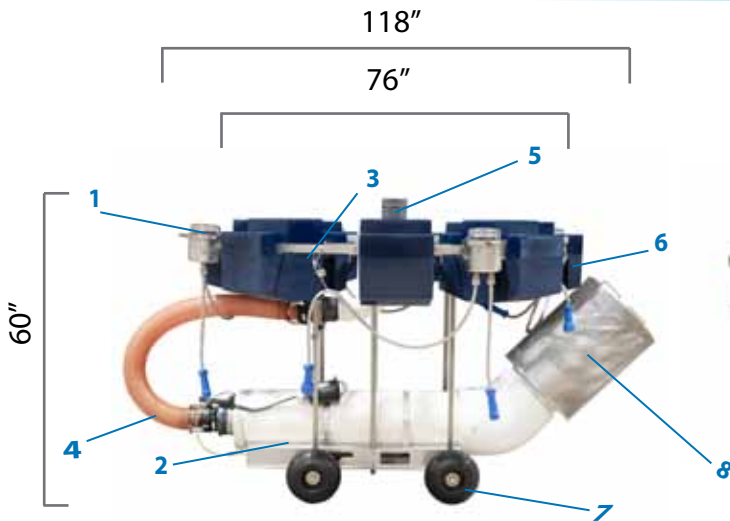

Galaxy Select® Series


- 1 - Tool Less Series 316 Stainless Steel Light Bracket
- 2 - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3 - 360° Available Tie Down Area
- 4 - Removable Discharge Tube and Intake Screen for Compact Storage
- 5 - Interchangeable Nozzles-Threaded and Tethered
- 6 - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7 - Easy Rolling Wheels with a Solid Axle
- 8 - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"


BRINGING WATER TO LIFE

INSTALLATION

ANCHORING

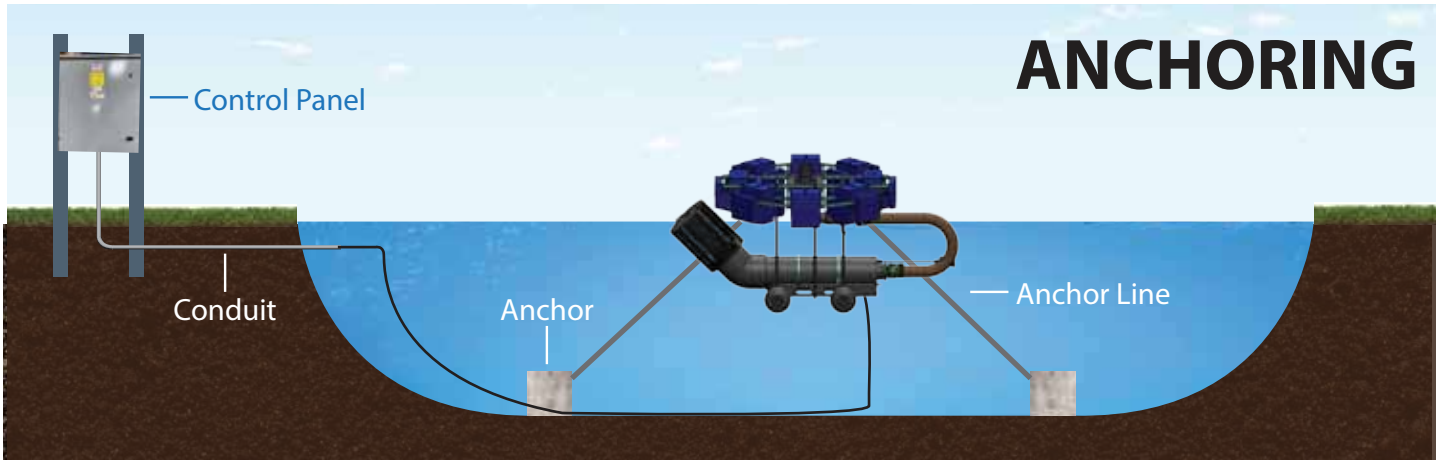

MOORING

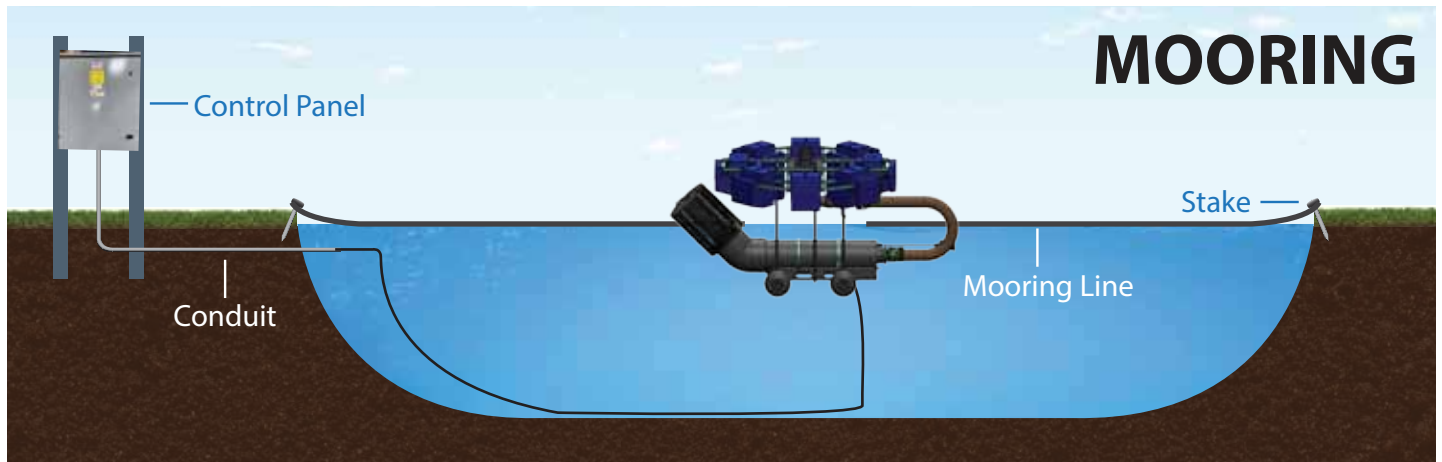

CONTROL PANEL

Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 overcurrent protection
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector



GALAXY SELECT® SERIES


LEO



HORSEPOWER	10	15	20	25
HT x DIA ft	50 x 10	56 x 10	61 x 10	67 x 10
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A 3 220-240 34A 3 440-480 17A	3 220-240 44A 3 440-480 22A	3 220-240 54A 3 440-480 27A	3 220-240 64A 3 440-480 32A

6H09

GALAXY SELECT® SERIES DESIGN

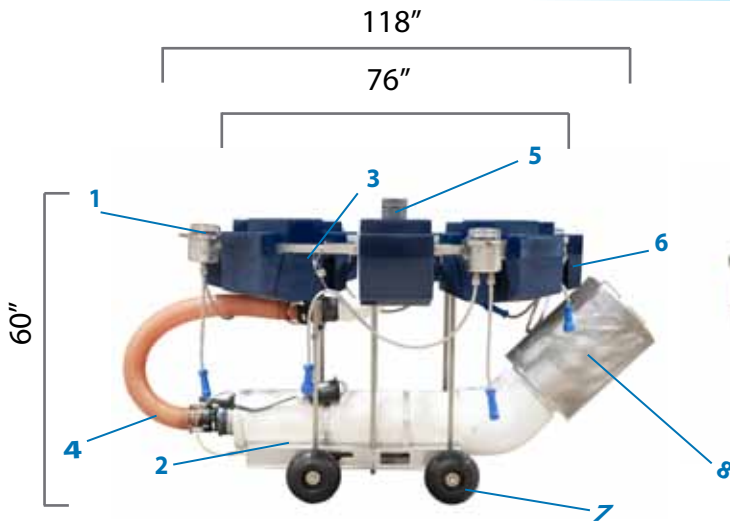

Galaxy Select® Series


- 1** - Tool Less Series 316 Stainless Steel Light Bracket
- 2** - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3** - 360° Available Tie Down Area
- 4** - Removable Discharge Tube and Intake Screen for Compact Storage
- 5** - Interchangeable Nozzles-Threaded and Tethered
- 6** - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7** - Easy Rolling Wheels with a Solid Axle
- 8** - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"


BRINGING WATER TO LIFE

INSTALLATION

ANCHORING

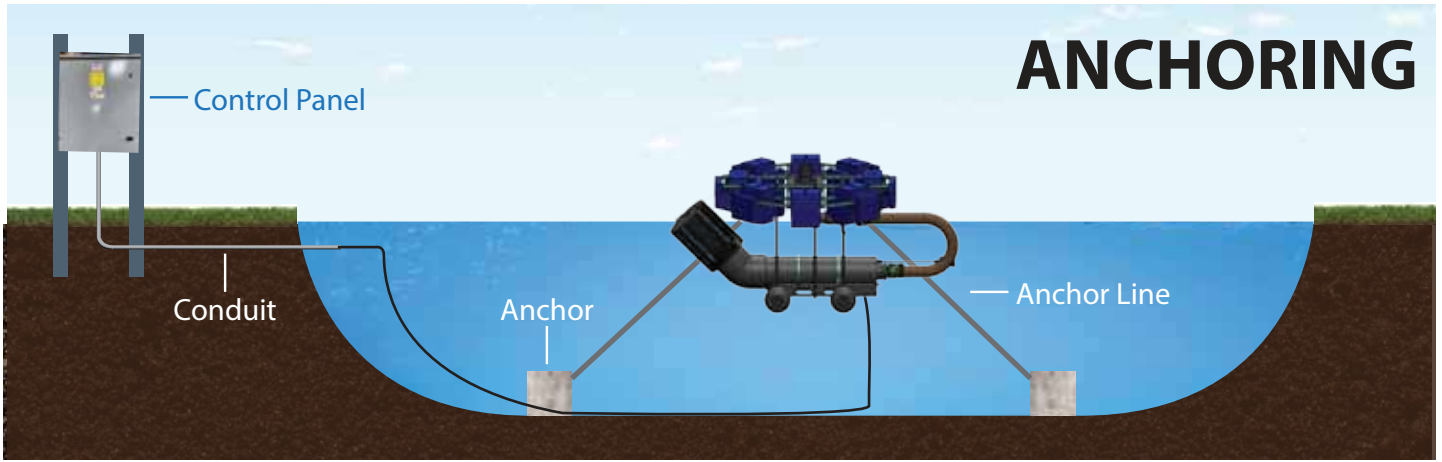

MOORING

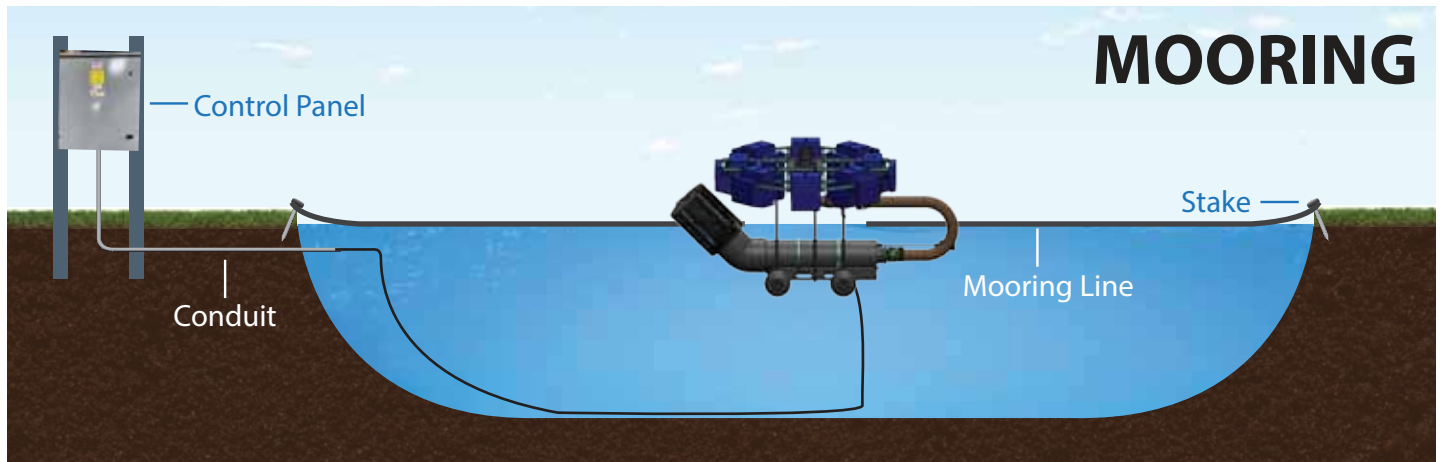

CONTROL PANEL

Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 overcurrent protection
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector



GALAXY SELECT® SERIES


OLYMPIAN



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	21 X 3	24 x 3	28 x 4	31 x 4
HT x DIA ft MIDDLE	17 x 3	18 x 3	20 x 4	27 x 4
HT x DIA ft LOWER	14 x 3	16 x 3	17 x 4	23 x 4
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A	3 220-240 44A	3 220-240 54A	3 220-240 64A
	3 220-240 34A	3 440-480 22A	3 440-480 27A	3 440-480 32A
	3 440-480 17A			

60Hz

GALAXY SELECT® SERIES DESIGN

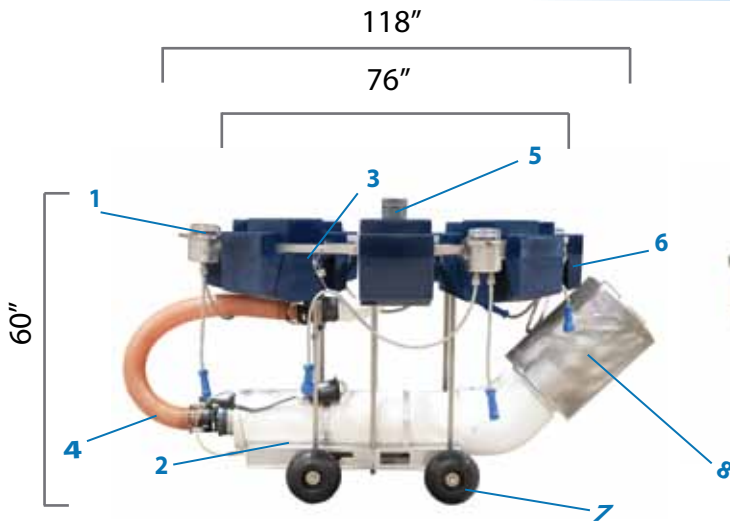

Galaxy Select® Series


- 1** - Tool Less Series 316 Stainless Steel Light Bracket
- 2** - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3** - 360° Available Tie Down Area
- 4** - Removable Discharge Tube and Intake Screen for Compact Storage
- 5** - Interchangeable Nozzles-Threaded and Tethered
- 6** - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7** - Easy Rolling Wheels with a Solid Axle
- 8** - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"


BRINGING WATER TO LIFE

INSTALLATION

ANCHORING

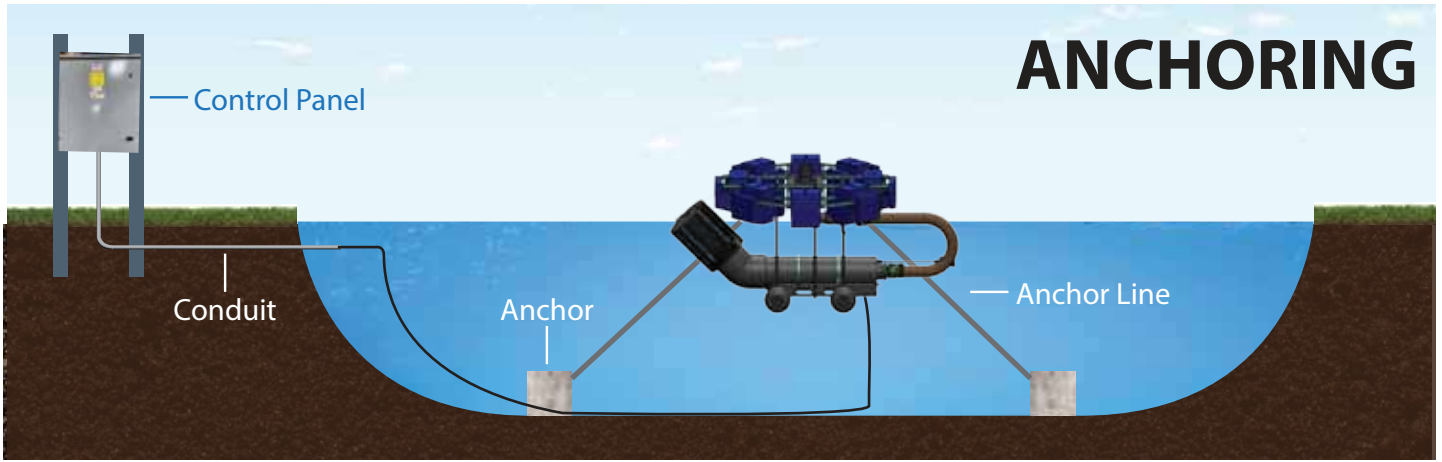

MOORING

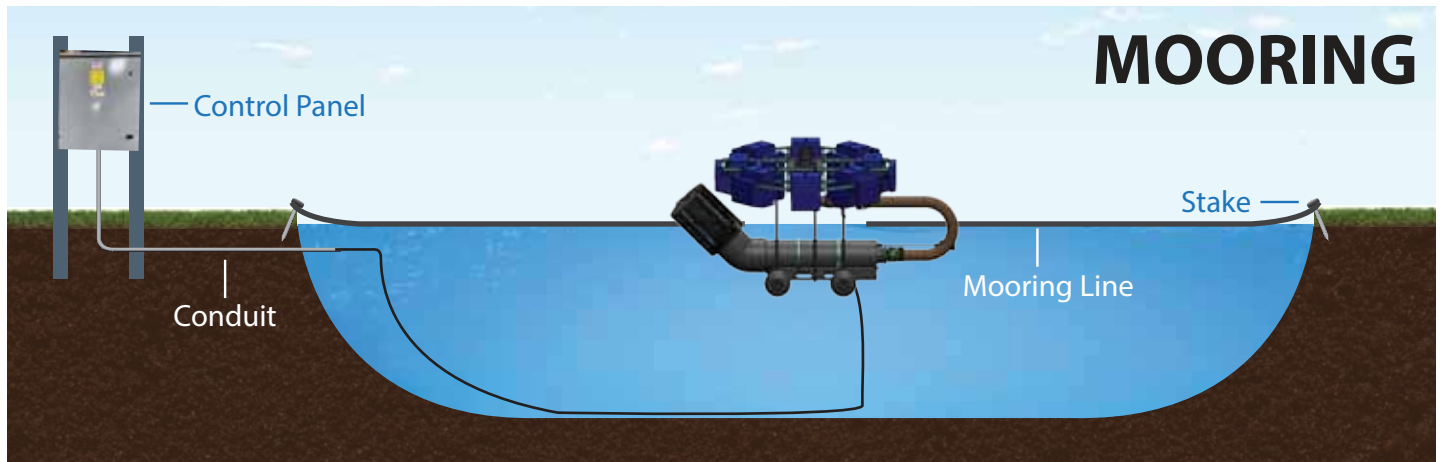

CONTROL PANEL

Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 overcurrent protection
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector




GALAXY SELECT® SERIES
TAURUS



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	42	55	60	64
HT x DIA ft MIDDLE	28 x 50	30 x 50	31 x 55	32 x 60
HT x DIA ft LOWER	12 x 65	13 x 65	15 x 70	16 x 75
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A 3 220-240 34A 3 440-480 17A	3 220-240 44A 3 440-480 22A	3 220-240 54A 3 440-480 27A	3 220-240 64A 3 440-480 32A

GALAXY SELECT® SERIES DESIGN

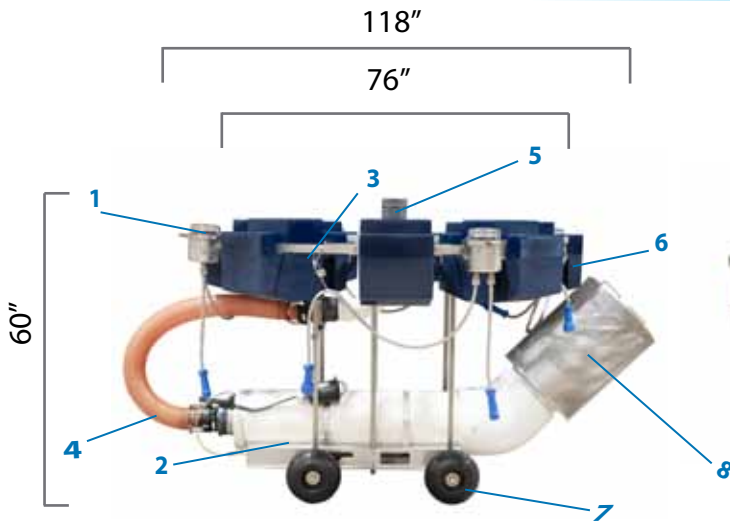


Galaxy Select® Series

- 1 - Tool Less Series 316 Stainless Steel Light Bracket
- 2 - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3 - 360° Available Tie Down Area
- 4 - Removable Discharge Tube and Intake Screen for Compact Storage
- 5 - Interchangeable Nozzles-Threaded and Tethered
- 6 - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7 - Easy Rolling Wheels with a Solid Axle
- 8 - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles


Minimum Operating Depth 62"

BRINGING WATER TO LIFE

INSTALLATION

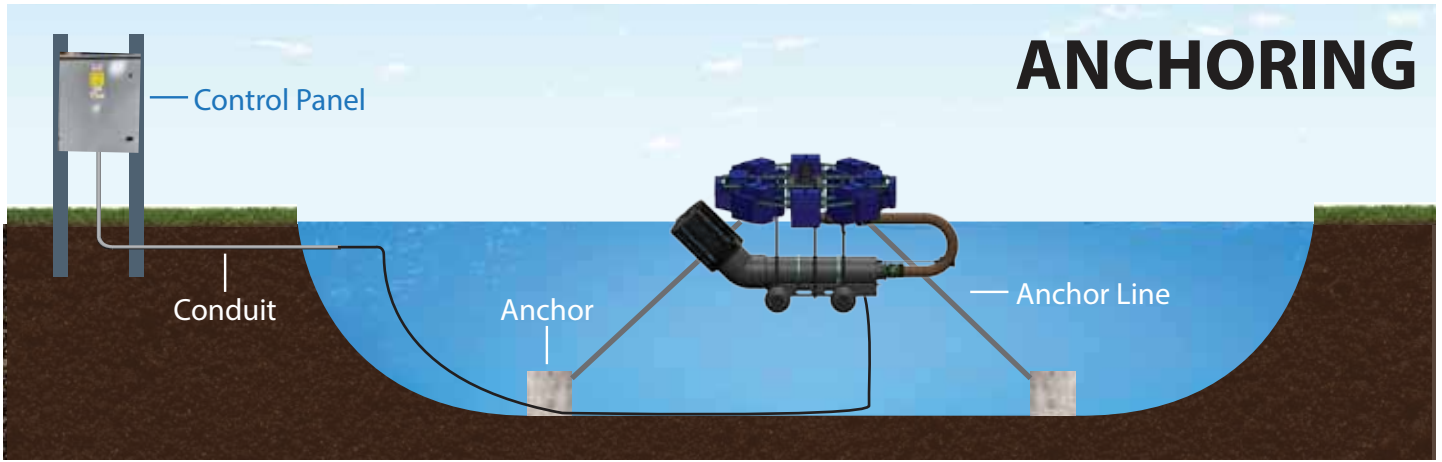

ANCHORING

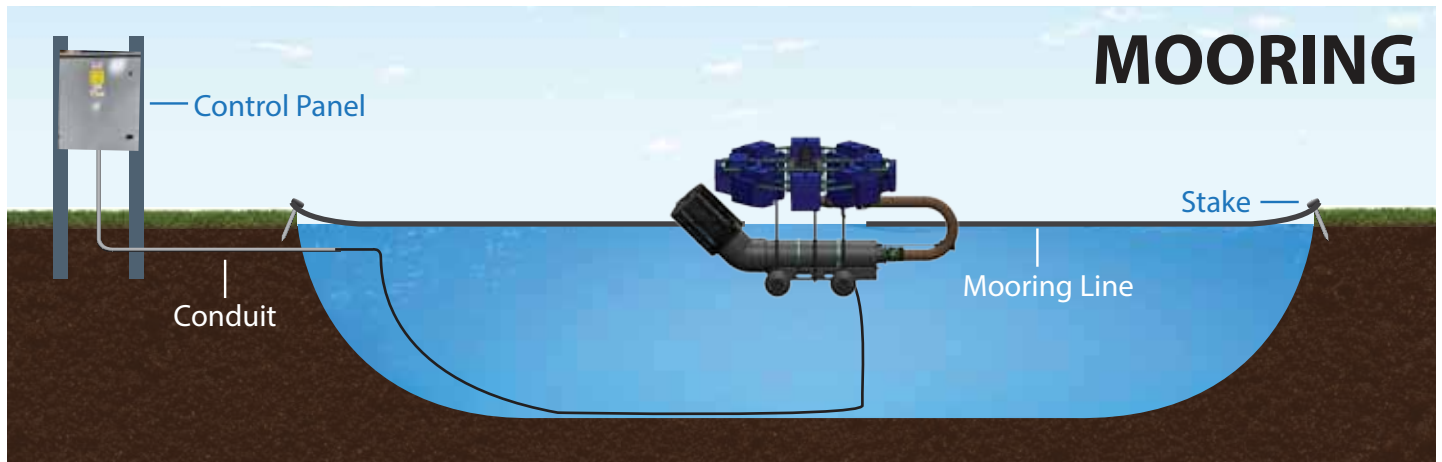

MOORING

CONTROL PANEL



Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 - overcurrent protection
 - undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector




GALAXY SELECT® SERIES

VIRGO



HORSEPOWER	10	15	20	25
HT x DIA ft UPPER	46	54	61	64
HT x DIA ft LOWER	21 x 60	22 x 65	23 x 65	24 x 65
ELECTRICAL RATING Ph VOLTAGE AMPS	1 220-240 58A 3 220-240 34A 3 440-480 17A	3 220-240 44A 3 440-480 22A	3 220-240 54A 3 440-480 27A	3 220-240 64A 3 440-480 32A

GALAXY SELECT® SERIES DESIGN

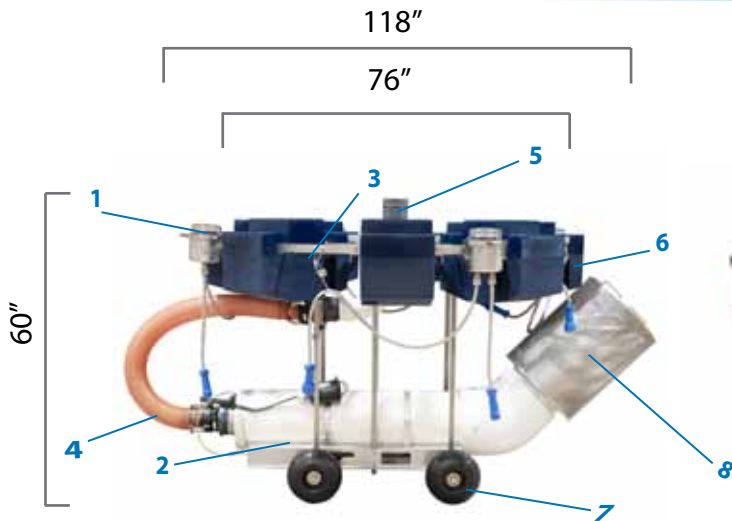



Galaxy Select® Series

- 1 - Tool Less Series 316 Stainless Steel Light Bracket
- 2 - Non-servicable, Oil Free, Water Cooled Motor with all Stainless Steel Pump Assembly
- 3 - 360° Available Tie Down Area
- 4 - Removable Discharge Tube and Intake Screen for Compact Storage
- 5 - Interchangeable Nozzles-Threaded and Tethered
- 6 - Removable Float Assembly for Easy Access to the Motor/Pump Assembly
- 7 - Easy Rolling Wheels with a Solid Axle
- 8 - Twist Locking Screen for Tool Less Removal for Cleaning with Double Handles

Minimum Operating Depth 62"

BRINGING WATER TO LIFE

INSTALLATION

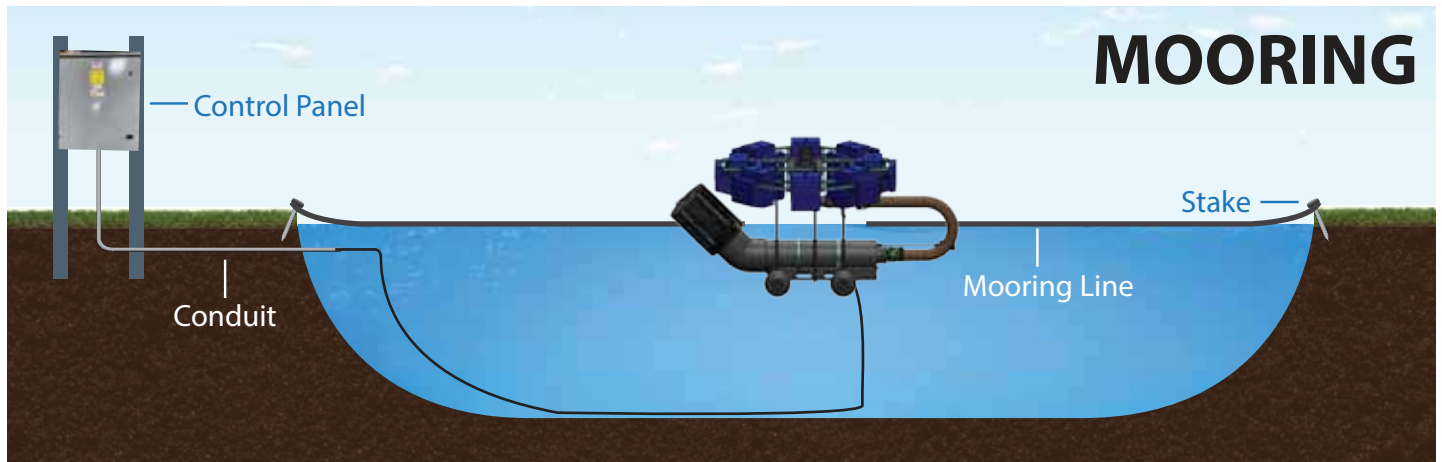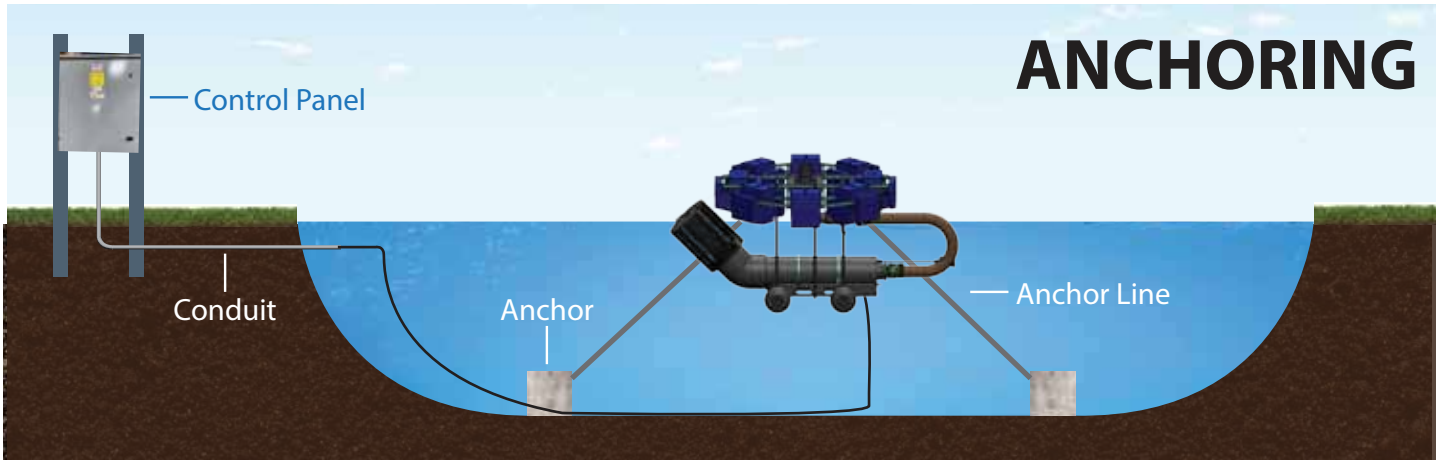

CONTROL PANEL

Control Panel Components

- Outdoor rated, lockable enclosure constructed of galvanized steel; powder coated gray
- Standard enclosure size 30" x 24" x 8"
- Digital timer with battery back-up
- LED lighting circuit included in all control panels
- Custom control panels for multiple units and options are available
- Franklin sub monitor provides:
 overcurrent protection
 undercurrent protection
- Ground fault protection
- Soft Starter and Manual Motor Protector

